



1" IF THIS BAR DOES NOT MEASURE EXACTLY ONE INCH, THE SCALE OF THIS DRAWING HAS BEEN ALTERED DURING ITS PRODUCTION, AFFECTING ALL LABELED SCALES

N:\Projects\10297.24002\City_Airport_Wtr_Exit\10297.24002-City_Airport_Wtr_Exit_V-003_PLAN(2).dgn Apr 17, 2025 7:16 AM

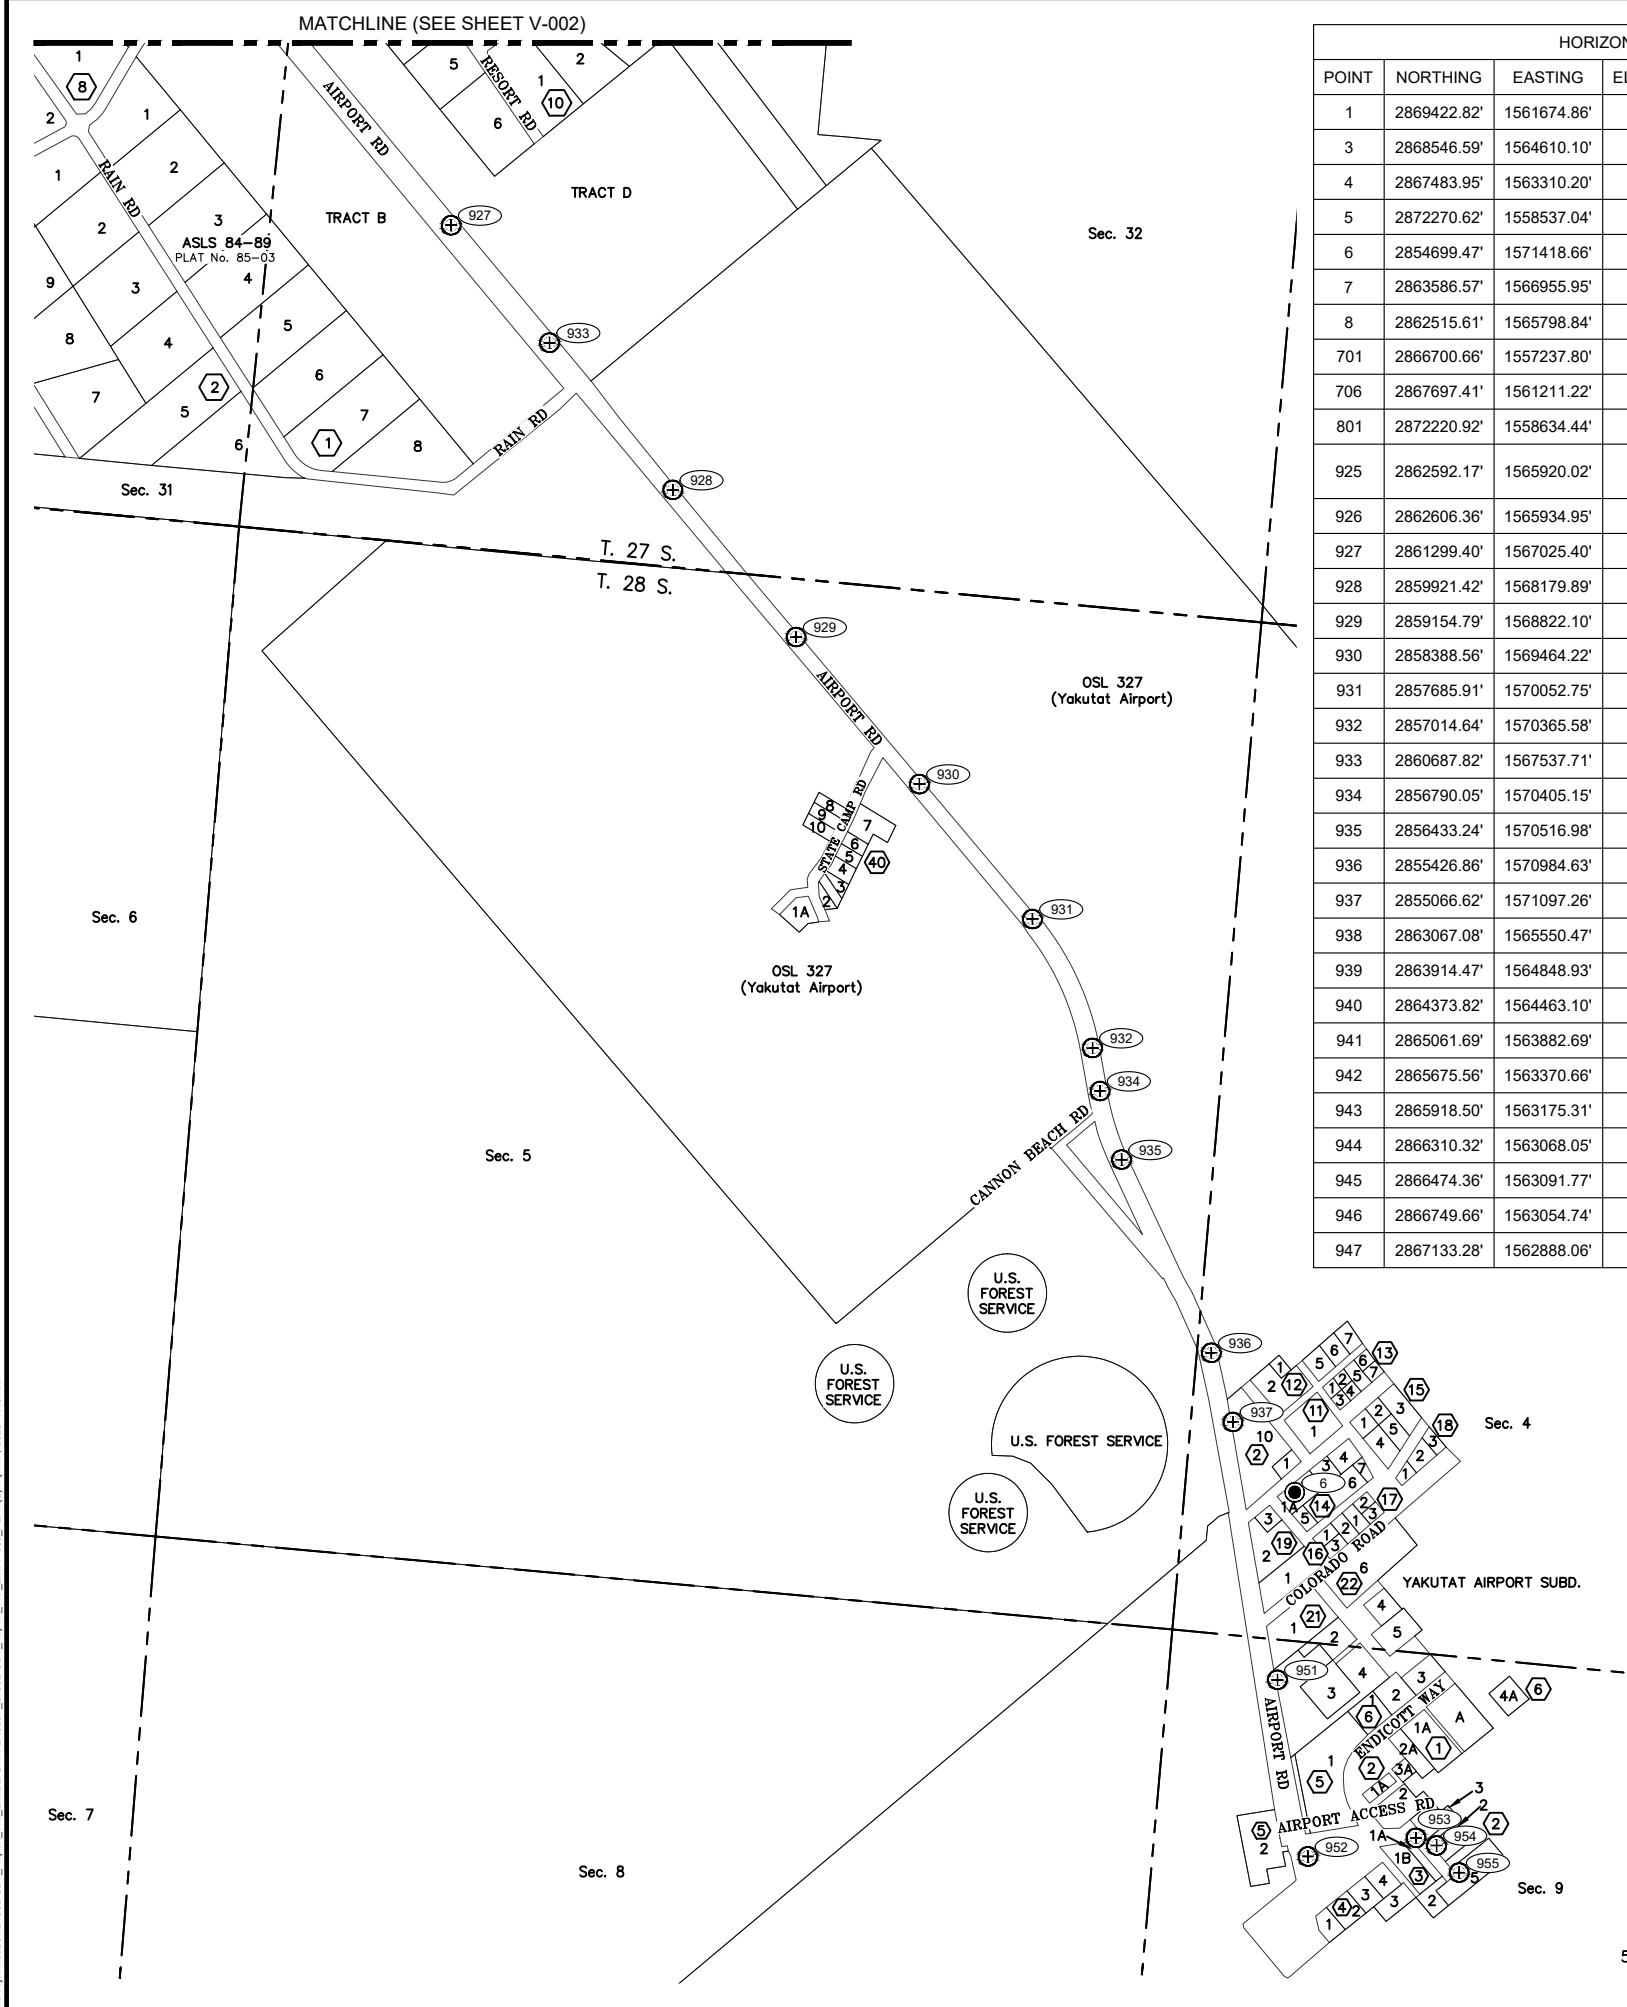

HORIZONTAL CONTROL TABLE				
POINT	NORTHING	EASTING	ELEVATION	DESCRIPTION
1	2869422.82'	1561674.86'	80.57'	SET YPC MARKED "RESPEC CONTROL"
3	2868546.59'	1564610.10'	73.83'	SET YPC MARKED "RESPEC CONTROL"
4	2867483.95'	1563310.20'	58.94'	SET SPIKE
5	2872270.62'	1558537.04'	16.14'	SET YPC MARKED "RESPEC CONTROL"
6	2854699.47'	1571418.66'	32.76'	SET YPC MARKED "RESPEC CONTROL"
7	2863586.57'	1566955.95'	56.79'	SET YPC MARKED "RESPEC CONTROL"
8	2862515.61'	1565798.84'	48.68'	SET YPC MARKED "RESPEC CONTROL"
701	2866700.66'	1557237.80'	70.75'	FOUND PRIMARY MON.
706	2867697.41'	1561211.22'	26.68'	FOUND REBAR
801	2872220.92'	1558634.44'	16.03'	FOUND REBAR
925	2862592.17'	1565920.02'	51.45'	FOUND PPC MARKED "LOUNSBURY CONTROL"
926	2862606.36'	1565934.95'	51.87'	FOUND CENTERLINE MON.
927	2861299.40'	1567025.40'	51.01'	FOUND CENTERLINE MON.
928	2859921.42'	1568179.89'	46.04'	FOUND CENTERLINE MON.
929	2859154.79'	1568822.10'	45.80'	FOUND CENTERLINE MON.
930	2858388.56'	1569464.22'	43.20'	FOUND CENTERLINE MON.
931	2857685.91'	1570052.75'	41.31'	FOUND CENTERLINE MON.
932	2857014.64'	1570365.58'	38.50'	FOUND CENTERLINE MON.
933	2860687.82'	1567537.71'	48.48'	FOUND CENTERLINE MON.
934	2856790.05'	1570405.15'	37.75'	FOUND CENTERLINE MON.
935	2856433.24'	1570516.98'	37.30'	FOUND CENTERLINE MON.
936	2855426.86'	1570984.63'	35.61'	FOUND CENTERLINE MON.
937	2855066.62'	1571097.26'	34.20'	FOUND CENTERLINE MON.
938	2863067.08'	1565550.47'	48.86'	FOUND CENTERLINE MON.
939	2863914.47'	1564848.93'	46.69'	FOUND CENTERLINE MON.
940	2864373.82'	1564463.10'	47.20'	FOUND CENTERLINE MON.
941	2865061.69'	1563882.69'	43.00'	FOUND CENTERLINE MON.
942	2865675.56'	1563370.66'	39.82'	FOUND CENTERLINE MON.
943	2865918.50'	1563175.31'	45.20'	FOUND CENTERLINE MON.
944	2866310.32'	1563068.05'	63.44'	FOUND CENTERLINE MON.
945	2866474.36'	1563091.77'	66.27'	FOUND CENTERLINE MON.
946	2866749.66'	1563054.74'	70.68'	FOUND CENTERLINE MON.
947	2867133.28'	1562888.06'	73.84'	FOUND CENTERLINE MON.

- LEGEND
- # POINT NUMBER
 - ⊕ FOUND PRIMARY MONUMENT IN CASE
 - ⊙ SET PLASTIC CAP ON REBAR
 - ⊖ BLOCK NUMBER
 - YPC YELLOW PLASTIC CAP
 - PPC PINK PLASTIC CAP

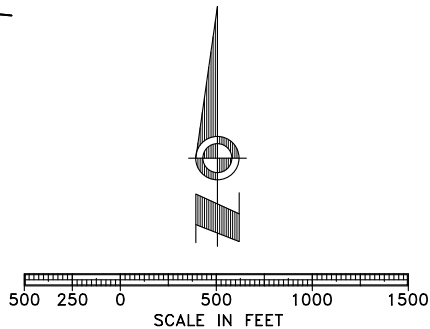

HORIZONTAL CONTROL TABLE				
POINT	NORTHING	EASTING	ELEVATION	DESCRIPTION
948	2866970.38'	1562889.05'	76.04'	FOUND CENTERLINE MON.
949	2866145.36'	1562987.12'	69.57'	FOUND CENTERLINE MON.
950	2866114.92'	1563167.93'	39.75'	FOUND CENTERLINE MON.
951	2853723.96'	1571328.82'	31.20'	FOUND CENTERLINE MON.
952	2852803.49'	1571487.47'	27.44'	FOUND CENTERLINE MON.
953	2852900.36'	1572049.95'	26.00'	FOUND CENTERLINE MON.
954	2852860.89'	1572157.29'	25.72'	FOUND CENTERLINE MON.
955	2852719.85'	1572275.40'	24.52'	FOUND CENTERLINE MON.
956	2865363.10'	1563039.70'	38.68'	FOUND BRASS CAP MON.
957	2864821.44'	1561868.66'	31.42'	FOUND BRASS CAP MON.
959	2865735.99'	1563238.95'	40.49'	FOUND IRON PIPE
991	2866194.18'	1562993.20'	67.73'	FOUND PRIMARY MON.
992	2865199.42'	1563852.92'	34.79'	FOUND PRIMARY MON.

VERTICAL CONTROL TABLE				
POINT	NORTHING	EASTING	ELEVATION	DESCRIPTION
6	2854699'	1571419'	32.76'	SET YPC MARKED "RESPEC CONTROL"
8	2862516'	1565799'	48.68'	SET YPC MARKED "RESPEC CONTROL"
601	2866723'	1562999'	74.96'	CHISELED "X" ON E FIRE HYDRANT BOLT
925	2862592'	1565920'	51.45'	FOUND PPC MARKED "LOUNSBURY CONTROL"
926	2862606'	1565935'	51.87'	FOUND CENTERLINE MON.
927	2861299'	1567025'	51.01'	FOUND CENTERLINE MON.
928	2859921'	1568180'	46.04'	FOUND CENTERLINE MON.
929	2859155'	1568822'	45.80'	FOUND CENTERLINE MON.
930	2858389'	1569464'	43.20'	FOUND CENTERLINE MON.
931	2857686'	1570053'	41.31'	FOUND CENTERLINE MON.
932	2857015'	1570366'	38.50'	FOUND CENTERLINE MON.
933	2860688'	1567538'	48.48'	FOUND CENTERLINE MON.
934	2856790'	1570405'	37.75'	FOUND CENTERLINE MON.
935	2856433'	1570517'	37.30'	FOUND CENTERLINE MON.
936	2855427'	1570985'	35.61'	FOUND CENTERLINE MON.
937	2855067'	1571097'	34.20'	FOUND CENTERLINE MON.
938	2863067'	1565550'	48.86'	FOUND CENTERLINE MON.
939	2863914'	1564849'	46.69'	FOUND CENTERLINE MON.
940	2864374'	1564463'	47.20'	FOUND CENTERLINE MON.
941	2865062'	1563883'	43.00'	FOUND CENTERLINE MON.
942	2865676'	1563371'	39.82'	FOUND CENTERLINE MON.
943	2865918'	1563175'	45.20'	FOUND CENTERLINE MON.
944	2866310'	1563068'	63.44'	FOUND CENTERLINE MON.
945	2866474'	1563092'	66.27'	FOUND CENTERLINE MON.
946	2866750'	1563055'	70.68'	FOUND CENTERLINE MON.
948	2866970'	1562889'	76.04'	FOUND CENTERLINE MON.
949	2866145'	1562987'	69.57'	FOUND CENTERLINE MON.
950	2866115'	1563168'	39.75'	FOUND CENTERLINE MON.
951	2853724'	1571329'	31.20'	FOUND CENTERLINE MON.
952	2852803'	1571487'	27.44'	FOUND CENTERLINE MON.
953	2852900'	1572050'	26.00'	FOUND CENTERLINE MON.
954	2852861'	1572157'	25.72'	FOUND CENTERLINE MON.
955	2852720'	1572275'	24.52'	FOUND CENTERLINE MON.

CONSULTANT :

CRAIG OWEN RANSON
No. 11798
4/16/25
REGISTERED PROFESSIONAL LAND SURVEYOR

Juneau, AK
9100 Mendota Mall Rd. Ste. 4
Juneau, AK 99801
Phone: 907.586.0060
Fax: 907.586.3771
AEC0163270

PROJECT :

CITY & BOROUGH OF YAKUTAT
WATER SYSTEM EXTENSION

YAKUTAT, ALASKA

SHEET TITLE :

SURVEY CONTROL PLAN (2 OF 2)

DESIGN
DRAWN
CHECKED
DATE

CES
EPV/COR
04-16-2025

PROJECT No.
10297.24002
SHEET NUMBER

V-003